

Highlights:

- Secure Safelatch™ system
- Excellent off-axis performance (up to 155°)
- Unique TwistFix™ grill design
- Borderless grill design
- Rotary switch for 6W, 12W, 24W and an 8 Ohm tapings
- Terminal block connection
- Shallow built-in depth (122 mm)
- null

Product information:



The CALI424 is a 2-way ceiling speaker with rear dome, constructed using a 4" cone driver, combined with an coaxially mounted 1" soft dome tweeter which is fitted with a phase plug for excellent off axis performance up to 155°.

The 2-way construction combination with metal rear-dome guarantees premium performance for demanding applications. A continuous power handling of 30 Watt (RMS) and maximum power handling of 60 watt is achieved, while fitted with a rotary switch for tapping of the 70/100V line transformer with tapings for 24W, 12W, 6W and an 8 Ohm bypass connection. What is new with CALI424II?

An enhanced weatherproof and humidity-proof coating on the speaker cone, making them even more durable for challenging open-air environments. When combined with the GLI optional grills, these updated CALI models now receive our official WeatherTreated outdoor rating, giving you full confidence in any installation.

Applications:

- null
- Retail
- null

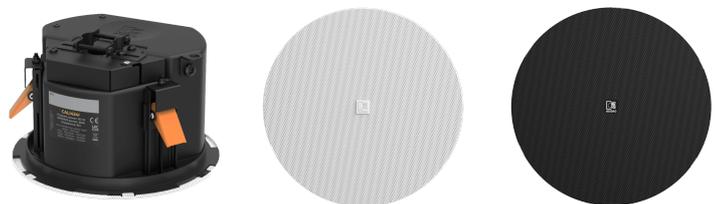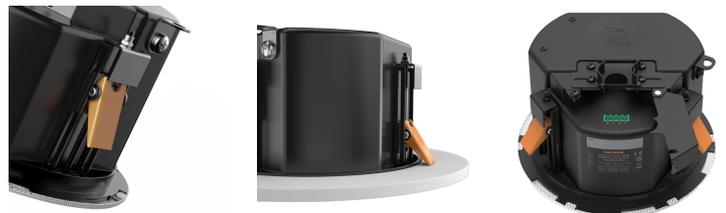

Certification:



Impedance:

Ω 8 Ohm

Voltage:

 70-100 Volt

Usage:



Indoor



Outdoor

System specifications:

Peak power handling		120 W
Program power handling		60 W
Continuous power (AES)		30 W
Sound Pressure (Max. W/1m)	@ 100 V	(CALI424) 101 dB
		(CALI424I & CALI424II) 101 dB
	@ 8 Ω	(CALI424I & CALI424II) 102 dB
Sensitivity (1W/1m)		(CALI424) 84 dB
		(CALI424I & CALI424II) 87 dB
Dispersion	Avg 1 kHz - 4 kHz -6 dB 1/3 Oct Conical	155°
Frequency	Response (\pm 3 dB)	(CALI424) 105 Hz - 20 kHz
		(CALI424I & CALI424II) 93 Hz - 20 kHz
	Range (-10 dB)	70 Hz - 20 kHz
Speaker type		2-way coaxial
Connection		null
		null
Line Transformer Tappings	1	208 Ω - 100 V / Not used - 70 V / 24 W
	2	417 Ω - 100 V / 24 W - 70 V / 12 W
	3	833 Ω - 100 V / 12 W - 70 V / 6 W
	4	1667 Ω - 100 V / 6 W - 70 V / 3 W
Ingress Protection rating		null

Product Features:

Cut-out measurement	6.69 " (Ø)
Dimensions	(CALI424) 192 x 110 mm (Ø x D)
	(CALI424I & CALI424II) 192 x 138 mm (Ø x D)
Built-in depth	(CALI424) 110 mm
	(CALI424I & CALI424II) 122 mm
Operating temperature	-4 °F ~ 140 °F
Weight	4.98 lb
Construction	ABS and powder coated steel
	Additional weatherproof & humidity proof coating to the speaker cone (CALI424II)
Mounting	SafeLatch™ mounting system

Variants:

- CALI424II/W - White version (RAL9016)