


Highlights:

- Highflex™ solid & flexible jacket
- 4 mm² (11 AWG) thin and dense stranded conductors
- 8 conductors for 4-channel loudspeaker connection

Product information:

The PLS840 is a high quality loudspeaker cable consisting of eight 4 mm² (11 AWG) conductors composed with 226 copper strands of 0.15 mm thickness. The combination of thin and dense strands with high purity copper and the flexible and solid PVC outer jacket makes it the perfect cable for various kinds of applications. The smooth outer jacket provides great ease of installation for fixed systems while having perfect rolling & unrolling performance for highly demanding mobile applications.

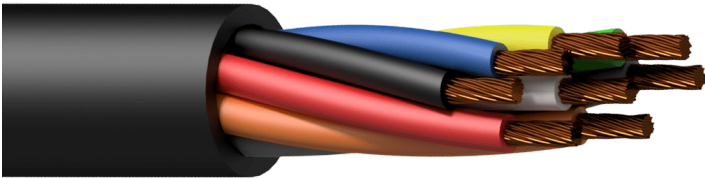

Certification:



Inner Conductors:



Product Features:

Application	null
Series	null

Physical Characteristics:

Inner conductor	Insulation	Material	PVC 3.75 mm (Ø)
		Colours	Black / White / Grey / Red / Green / Blue / Yellow / Orange
Outer jacket	Material		NBR 18 mm (Ø)
		Colours	Black
Type of cable	8-core loudspeaker cable		
Inner conductor	Material	BC 226 x 0.15 mm (Ø) (OFC)	
		Section	0.0062 "²
		American Wire Gauge	11 AWG
		Number of conductors	8

Mechanical Characteristics:

Temperature range	Fixed installation	- 68 °F till + 158 °F
	Mobile installation	- 41 °F till + 158 °F
Bending radius	Fixed installation	5 x outer diameter
	Mobile installation	10 x outer diameter

Electrical Characteristics:

Lead resistance	0.5 Ω / 100 m
-----------------	---------------

Variants:

- PLS840/1 - 100 m wooden reel