

HDMI A male - HDMI A male - Active optical - Interchangeable connectors

Highlights:


- Supports up to ultra HD 4K 2160p (4096 x 2160) 4:4:4 at 60 Hz
- HDMI 2.0 compliant
- Fiber optic technology
- Flexible outer jacket
- Exchangeable connectors
- HDMI ARC up to 50 meter
- null

Product information:

The CLV220A is an active optical HDMI 2.0 cable aimed for fixed installations. It is able to transmit resolutions up to ultra HD 4K 2160p (4096 x 2160) at 60 Hz with a bandwidth of 18Gbps via OM3 fiber optical fiber technology, eliminating the possibility of electronic interference. The interchangeable connectors enable you to easily detach and reattach the connectors. This way the cable can be fitted through holes and straight tubes with diameters as small as 25 mm.

The CLV220A comes with a USB A to USB Micro B cable included, which is an accessory only required when the HDMI port on the transmitter side is delivering insufficient voltage (typically required when ≤ 4.8 V) for powering the receiver end. The power is transferred from transmitter end to receiver end over the CLV220A cable.


Most general HDMI sources deliver sufficient voltage making the additional cable unnecessary. However typical applications where it might be required are e.g. streaming media player boxes, which might deliver insufficient voltage over their HDMI output.

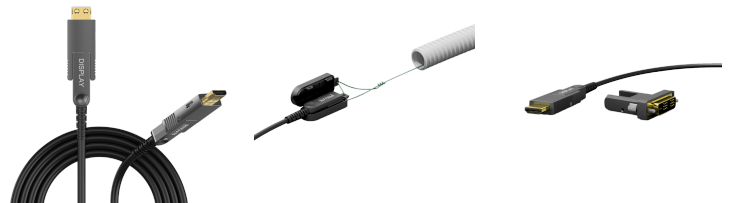

Certification:



Properties:



Product Features:

Application		null
Series		null
Accessories	Included	COP110
		Pulling capsule case
		Screwdriver
		USB power cord (Optional use on RX side)
	Optional	COP140

Physical Characteristics:

Inner conductor	Insulation	Material	PE 0.9 mm (Ø)
			PE 1 mm (Ø)
	Shielding	Aluminium foil	null
		Drain wire	TC 11 x 0.08 mm (Ø) (OFC)
Overall shielding	Aluminium foil		null
Outer jacket	Material		LSHF 4.5 mm (Ø)
	Colours		Black
Strength test	Bending radius		0.79 "
	Tensile strength test		55.12 lb
	Connector bending test		> 10000 cycles
	Connector pull out force		4.41 lb
Pulling capsule diameter			0.91 " (recommended conduit 1.26 ")
Inner conductor	Material		TC 11 x 0.08 mm (Ø) (OFC)
			TC 19 x 0.08 mm (Ø) (OFC)
			TC 30 x 0.08 mm (Ø) (OFC)
			TC 41 x 0.08 mm (Ø) (OFC)
			null
	Section		0.000078 "²
			0.00012 "²
			0.00022 "²
			0.00039 "²
	Number of conductors		12
	Conductor twisting		Yes

Mechanical Characteristics:

Temperature range Fixed installation - 32 °F till + 167 °F

Variants:

- CLV220A/10 - 10 meter
- CLV220A/15 - 15 meter
- CLV220A/20 - 20 meter
- CLV220A/30 - 30 meter
- CLV220A/40 - 40 meter
- CLV220A/50 - 50 meter
- CLV220A/70 - 70 meter
- CLV220A/100 - 100 meter